

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)


PCT

(10) International Publication Number  
WO 2004/026714 A1

- (51) International Patent Classification: B65D 25/46, 47/06
- (21) International Application Number: PCT/GB2003/004127
- (22) International Filing Date: 19 September 2003 (19.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0221982.2 21 September 2002 (21.09.2002) GB
- (71) Applicant (for all designated States except US): FBI HOME & GARDEN LIMITED [GB/GB]; Durham House, 214-224 High Street, Waltham Cross, Hertfordshire EN8 7DP (GB).
- (72) Inventors; and  
(75) Inventors/Applicants (for US only): GOLDING, Colin [GB/GB]; 1 Lodge Close, Chigwell, Essex IG7 6JL (GB). NICHOLSON, Keith, Michael [GB/GB]; 186 Station Road, Harpenden, Hertfordshire AL5 4UL (GB).
- (74) Agent: BARKER DRETTELL; 138 Hagley Road, Edgbaston, Birmingham B16 9PW (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM).

(Continued on next page)

(54) Title: GRANULE DISTRIBUTING APPARATUS

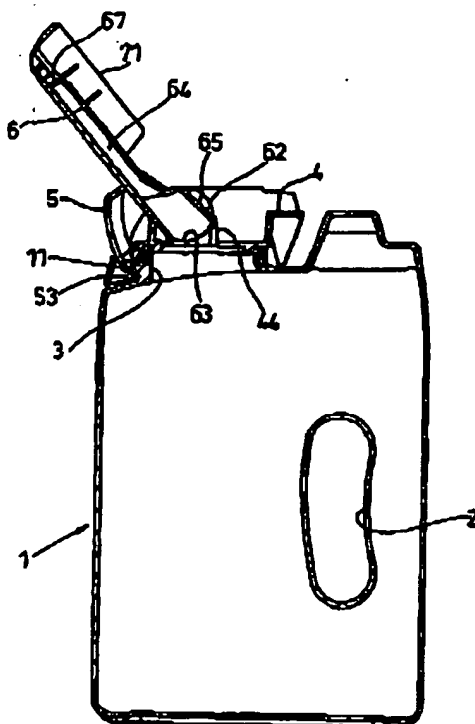

(57) Abstract: Granule distributing apparatus comprises a container (1) having a discharge opening (3) for a product to be distributed and a duct member (6) connected to the discharge opening provides a distribution chamber (64) for the product. The duct member (6) is foldable between working and storage positions. In the working position it projects away from the container (1) and allows products to pass through the discharge opening (3) and along the distribution channel (64). In its storage position the duct member (6) obscures the discharge opening (3) and extends over the top of the container. A locking member (5) is preferably provided which is manipulatable to locate the duct member (6) in the working position and also serves to close an entry end of the distribution channel (64) when the duct member is in the storage position.

WO 2004/026714 A1

BEST AVAILABLE COPY